


Configuring the AUT to Work with Provisioned Assets

The following is a brief overview of how to configure your AUT to work with any virtual assets, message proxies, and JDBC controllers you have provisioned. For complete details, see the Virtualize User's Guide.

Message Proxies

To direct your AUT to a proxy, point it to the endpoint (e.g., an HTTP path, MQ destination/client queue, or JMS destination/client topic or queue) where the proxy is listening for incoming messages. This is shown in Endpoint Report page.

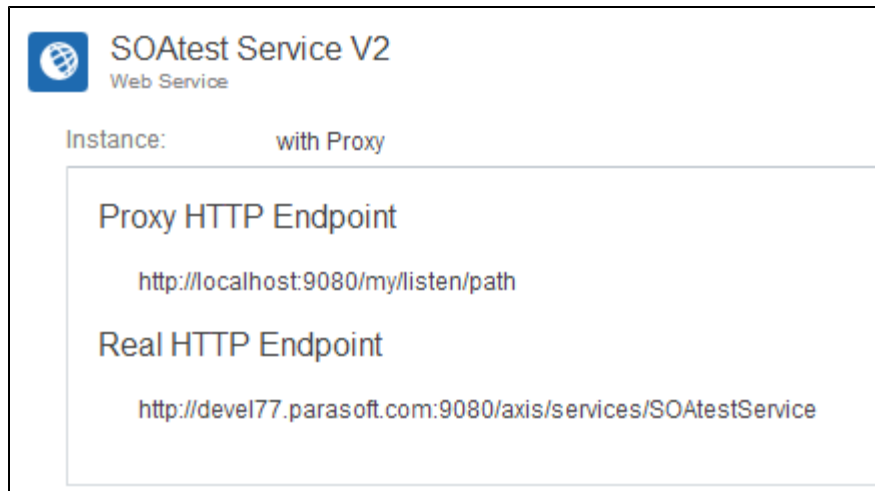

SOAtest Service V2
Web Service

Instance: with Proxy

Proxy HTTP Endpoint
`http://localhost:9080/my/listen/path`

Real HTTP Endpoint
`http://devel77.parasoft.com:9080/axis/services/SOAtestService`

To access this report, click the **Endpoints** link in a page header.



Environment | Instances | Endpoints

Virtual Assets

If you are provisioning a virtual asset that is not controlled via a message proxy, you can point your application to the virtual asset's endpoint. For HTTP/S endpoints, select the virtual asset in tree, then use the endpoint shown on the right.

Virtual Assets

List All

The screenshot shows the 'Virtual Assets' interface. On the left, a tree view lists assets under the 'emdemo' folder, with 'Bookstore2.pva' selected. The main panel displays the details for 'Bookstore2'. It includes a 'Save' button, a 'Name' field containing 'Bookstore2', a 'Description' text area, 'Tags' set to 'None', a 'Filepath' of '/VirtualAssets/Bookstore2.pva', and a 'Server' of 'emdemo'. A green box highlights the 'HTTP Endpoints' section, which contains the URL 'http://emdemo.parasoft.com:9080/Bookstore2'.

For MQ and JMS endpoints, endpoint information is shown on the Deployed Virtual Asset's detail page.

Transports

The screenshot shows the 'Transports' section with the following text:

```
HTTP:
  HTTP endpoint: http://localhost:9080/Bookstore2
```


JDBC Controllers

The following Java system properties are required startup parameters for the AUT:

- `parasoft.virtualize.group.id`: The equivalent of the `virtualizeGroupId` driver property; the default is `hostname`.
- `parasoft.virtualize.server.url`: The equivalent of the `virtualizeServerUrl` driver property.

CTP's Endpoint Report provides the system properties that your AUT needs to use. To access this report, click the **Endpoints** link in a page header.

The screenshot shows a navigation menu with three items: 'Environment', 'Instances', and 'Endpoints'. The 'Endpoints' link is underlined and has a mouse cursor pointing to it.

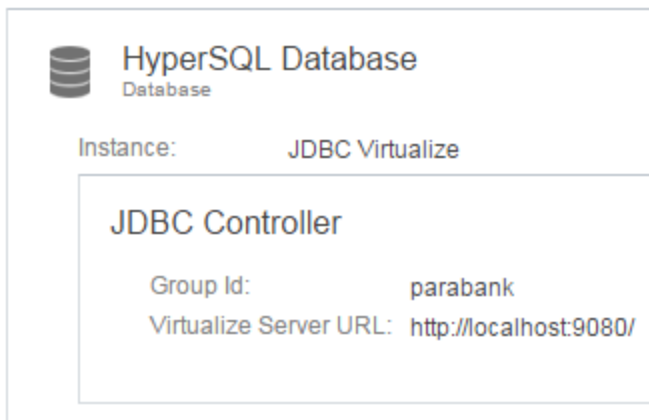

In some cases, (e.g., for standalone Java applications that are deployed in application servers that do not manage data source configurations), you also need to specify `parasoft.virtualize.driver.register.jdbcproxydriver.in.drivermanager`, which defaults to false. This flag determines whether Parasoft's JDBC driver should register itself in the runtime's `java.sql.DriverManager` using the `DriverManager.registerDriver()` method. This option depends on whether:

- The application uses a `java.sql.DriverManager` to create an instance of `java.sql.Driver` (in which case "true" is the common setting). This applies to the ParaBank sample application, where this property should be set to true.
- The driver is being used in a Web application environment (such as WebSphere or WebLogic). In this case, this property should be left false.


You can usually specify these either through the Admin GUI or as command-line arguments to Java using the `-D<prop_name>=<prop_value>` syntax.

For additional help, see the Virtualize User's Guide (Using the Parasoft JDBC Driver).

The following is a brief overview of how to configure your AUT to work with any virtual assets, message proxies, and JDBC controllers you have provisioned. For complete details, see the Virtualize User's Guide.

Message Proxies

To direct your AUT to a proxy, point it to the endpoint (e.g., an HTTP path, MQ destination/client queue, or JMS destination/client topic or queue) where the proxy is listening for incoming messages. This is shown in Endpoint Report page.

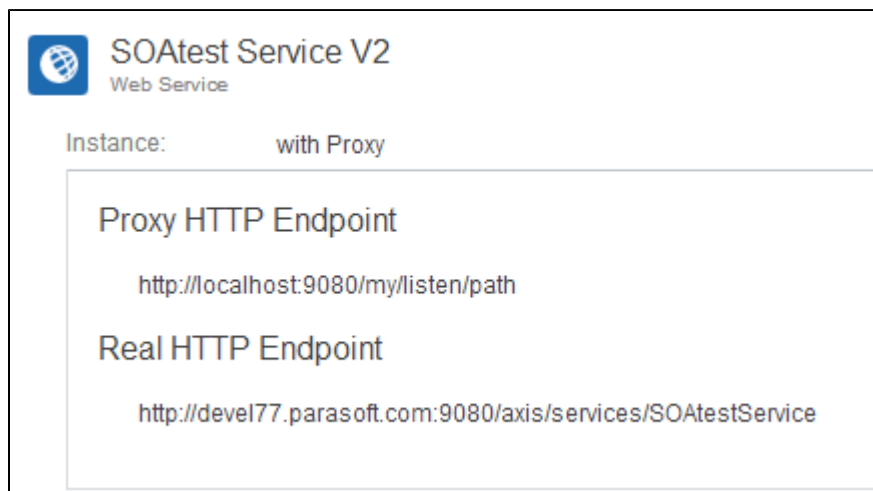

To access this report, click the **Endpoints** link in a page header.



Virtual Assets

You can directly access a virtual asset (e.g., if your virtual asset is not controlled by a proxy) by pointing your application to the virtual asset's endpoint. For HTTP/S endpoints, select the virtual asset in the tree, then use the endpoint shown on the right.

The screenshot displays the 'Virtual Assets' management interface. On the left, a tree view shows a folder named 'emdemo' containing several sub-items, with 'Bookstore2.pva' selected. On the right, the details for 'Bookstore2' are shown, including its name, description, tags, file path, and server. A green box highlights the 'HTTP Endpoints' section, which lists the URL 'http://emdemo.parasoft.com:9080/Bookstore2'.

For MQ and JMS endpoints, endpoint information is shown on the Deployed Virtual Asset's detail page.

The screenshot shows the 'Transports' section of the interface. It lists the 'HTTP' transport and its endpoint configuration: 'HTTP endpoint: http://localhost:9080/VirtualServicesCD'.

JDBC Controllers

The following Java system properties are required startup parameters for the AUT:
parasoft.virtualize.group.id: The equivalent of the virtualizeGroupId driver property; the default is hostname.
parasoft.virtualize.server.url: The equivalent of the virtualizeServerUrl driver property.

In some cases, (e.g., for standalone Java applications that are deployed in application servers that do not manage data source configurations), you also need to specify **parasoft.virtualize.driver.register.jdbcproxydriver.in.drivermanager**, which defaults to false. This flag determines whether Parasoft's JDBCProxyDriver should register itself in the runtime's java.sql.DriverManager using the DriverManager.registerDriver() method. This option depends on whether:

- The application uses a java.sql.DriverManager to create an instance of java.sql.Driver (in which case "true" is the common setting). This applies to the ParaBank sample application, where this property should be set to true.
- The driver is being used in a Web application environment (such as WebSphere or WebLogic). In this case, this property should be left false.

You can usually specify these either through the Admin GUI or as command-line arguments to Java using the `-D<prop_name>=<prop_value>` syntax.

CTP's Endpoint Report provides the system properties that your AUT needs to use. To access this report, click the **Endpoints** link in a page header.



For additional help, see the Virtualize User's Guide (Using the Parasoft JDBC Driver).