

# Removing and Erasing Repositories


You can remove any displayed repository from the Data Repositories view and the Data Repository Server.

If you want to erase a repository's contents, you apply the Data Repository tool.

## Delete and Remove from View

To remove a repository from the Data Repositories view and delete it from the Data Repository Server:

- Right-click the appropriate repository node in the Data Repositories view, then choose **Delete Repository**.

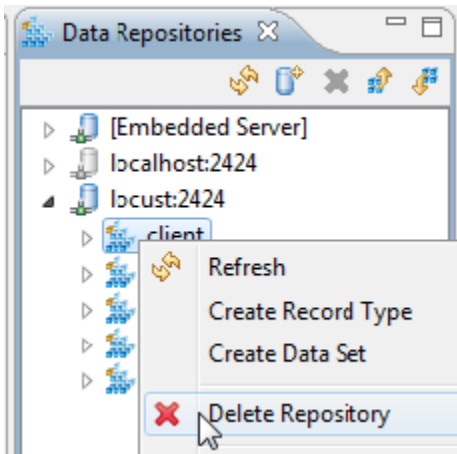

## Erase Repository Contents

To erase a repository's content using the Data Repository tool:

1. Ensure that the Data Repository Server you will be populating is running.
2. To an existing (or empty) project, create a new .tst or provision action file with an empty test or action suite:
  - a. Choose **File> New> Test (.tst) file** or **Provisioning Action (.pvn) file**.
  - b. Enter a file name, then click **Next**.
  - c. Choose **Empty**, then click **Finish**.
3. Add the Data Repository tool to that suite:
  - a. Right-click the **Test Suite** or **Action Suite** node and choose **Add New> Test** or **Action**.
  - b. Select **Data Repository Tool**, then click **Finish**.
4. Configure the Data Repository tool.
  - a. Double-click the **DataRepository Tool** node.
  - b. Ensure that the Target Repository is set to the Repository Data Source that you just created.
  - c. Select the **Erase Repository** option.
5. Select the Data Repository tool that you created, then click the **Run** toolbar button.