


Enabling and Configuring the Engine

1. In your IDE, click **Parasoft** in the menu bar and choose **Options**.
2. Select **Engines**.



3. Enable the desired engine by checking **Enable** and specifying the location of the dotTEST executable.

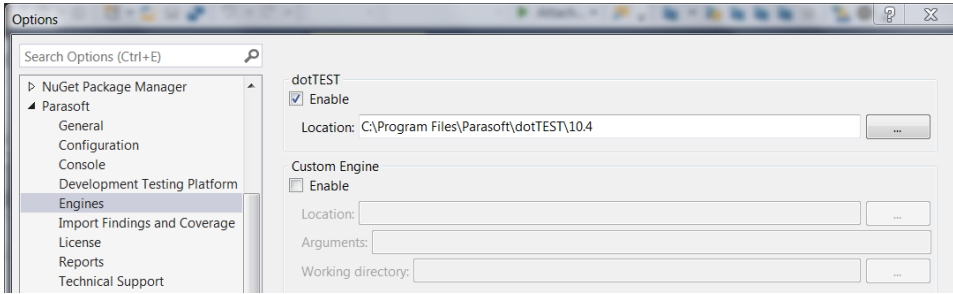

When you enable an engine, a default test configuration is made active for running code analysis. You can change the active test configuration (see [Setting the Active Test Configuration](#)), as well as add additional Test Configurations to the Favorites menu (see [Saving Test Configurations to the Favorites Menu](#)).

Ensure that the dotTEST Engine version is the same as the Plugin. Updating the Engine requires reinstalling the Plugin.