


# Configuring Import Options

This topic explains how to configure import parameters, such as priority level, and severity level, that determine which findings are imported from DTP into your IDE.

1. Click **Parasoft** in the menu bar and choose **Import> Import Settings** or **Preferences> DTP> Import Settings** to open the configuration page.
2. Choose your import options. The available options are described below.
3. Click **Apply** to save your settings.

## Available Options

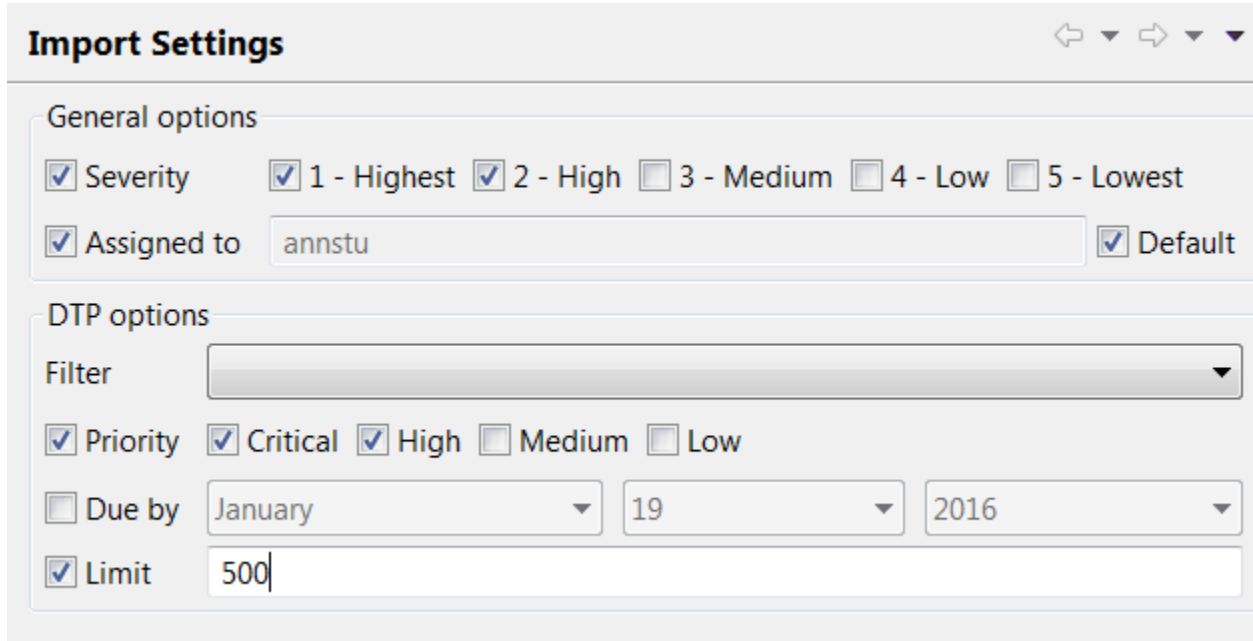

**Import Settings**

General options

Severity     1 - Highest     2 - High     3 - Medium     4 - Low     5 - Lowest

Assigned to    annstu     Default

DTP options

Filter

Priority     Critical     High     Medium     Low

Due by    January    19    2016

Limit    500

## General Options

- **Severity:** Allows you to specify which findings to import according to severity level; enable the **Severity** option and select your options.
- **Assigned to:** Allows you to import findings assigned to a selected user. Enable the **Assigned to** option and specify the user name. You can enable the **Default** option to import findings assigned to the local user.

## DTP Options

To import findings from DTP, ensure that your DTP is properly configured; see [Connecting to DTP](#).

- **Filter:** To import only data associated with a specific DTP filter, choose a filter from the **Filter** drop-down menu. Filters are identifiers used in DTP for organizing data.
- **Priority:** To import findings according to a specific priority level, enable the **Priority** option and choose which findings to import.
- **Due by:** To import all violations that are due any time between the present date and the date specified--not just the violations due on that date, enable the **Due by** option.
- **Limit:** To limit the number of findings imported, enable the **Limit** option and enter a value in the field.