

# Associating Requirements with Tests


You can associate requirements with test assets and test suites. SOAtest 9.10 or higher is required to use this functionality.

In this chapter:


- [Making New Associations](#)
- [Removing Associations](#)
- [Editing Associations](#)

## Making New Associations


1. In the navigator, click on the test asset or test suite you want to associate requirements with.

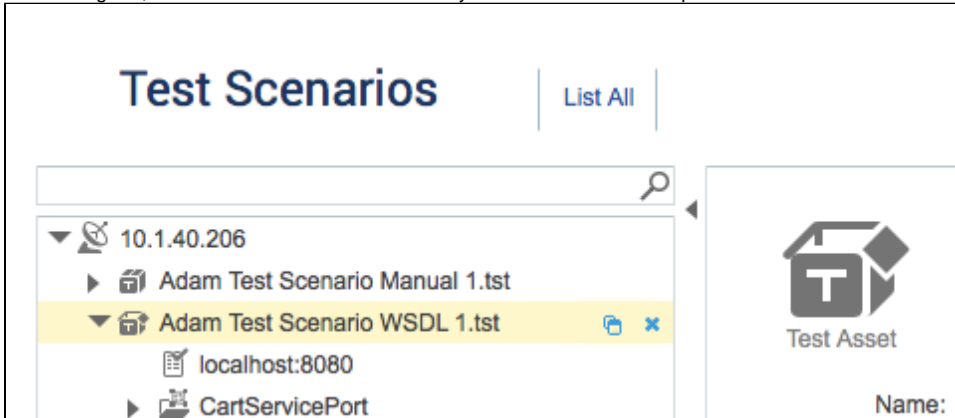

2. Click the add button in the requirements section.

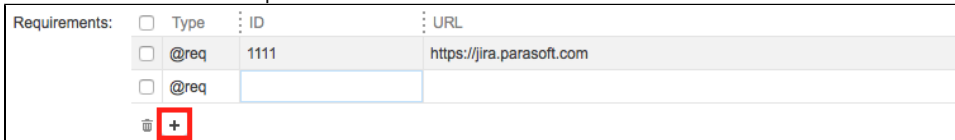

3. Enter an ID. A requirement type and an ID are required, but URLs are optional. By default, @req types are added, but you can click on the type field to change the requirement type.

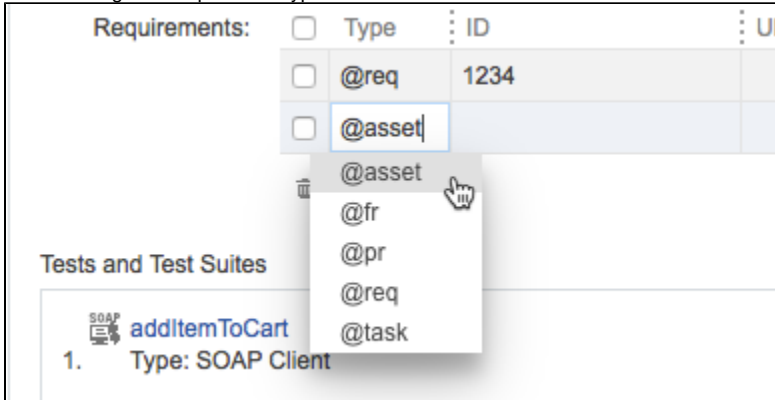

The following types are currently supported:

- asset
- fr
- pr
- req
- task

4. Click **Save**.

## Removing Associations

To disassociate a test with a requirement, select it and click the trash button.

Requirements:  Type ID

<input type="checkbox"/>	@req	4444
<input type="checkbox"/>	@req	1234
<input checked="" type="checkbox"/>	@asset	

+

Tests and Test Suites Delete selected requirement(s)

## Editing Associations

Click in a requirement field and make changes to edit an association.

Associations made at the test asset level are read-only in the Requirements section of test suites under the test asset. You must edit the association for the test asset

Requirements:  Type ID URL

<input type="checkbox"/>	@req	4444	
<input type="checkbox"/>	@req	1234	
<input type="checkbox"/>	@asset		

+