


Accessing the Embedded Data Repository Server

The embedded data repository server is automatically installed with SOAtest and Virtualize. The server starts up when you launch SOAtest or Virtualize and is added to the Data Repositories view (under the **Embedded Server** node).

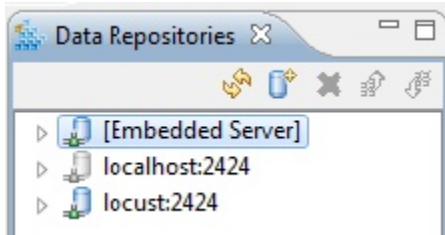

The embedded data repository's port is automatically set based on port availability. If you want to see which port is being used:

1. Choose **Parasoft> Preferences**.
2. Open the **Server** page.
3. Review the port information in the **Data Repository** field.

